


### 機械用途/USE:

- 紙張、紙板、蜂巢紙(瓦楞紙)、薄片塑膠、薄纖維布、薄木片...等。  
Suitable for paper, cardboard, corrugated paper, thin plastics, leather slice, slice fiber cloth, veneer etc.

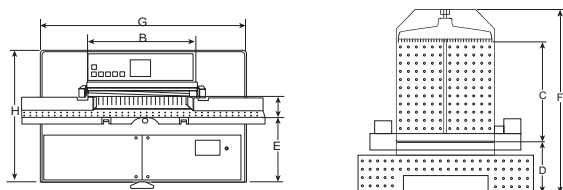

型號/Model	CH-660	CH-720	CH-940	CH-1060	CH-1210	CH-1510	CH-1660
A 裁切厚度/Cut thickness (mm)	120	120	135	135	135	135	135
B 裁切寬度/Cut width (mm)	660	720	940	1060	1210	1510	1660
C 裁切長度/Cut length (mm)	660	720	940	1060	1210	1420	1660
D 前抬長度/Front table length (mm)	540	540	630	630	630	630	630
E 抬面高度/Table height (mm)	820	820	860	860	860	860	860
F 總長度/Total length (mm)	1720	1780	2160	2340	2600	2800	2820
G 總寬度/Total width (mm)	1510	1570	2160	2450	2500	3020	3200
H 總高度/Total height (mm)	1470	1470	1500	1560	1800	1800	1800
總重量/Gross weigh (kg)	1500	1550	2200	2400	3500	4000	4700
主機馬達/Main motor (HP)	1	1	3	3	5	7.5	7.5
油壓馬達/Hydraulic motor (HP)	1	1	2	2	3	3	3
推紙馬達/Computer motor (HP)	0.5	0.5	1	1	1	1	1

### 特點/FEATURE:

- 機座是以高強度鑄造結構所組合而成,機械運轉穩固,且裁切準確。  
Machine seat is constructed by high strength casting, with stable performance and accurate cutting.
- 電器安全防護設備齊全,操作安全。  
Complete electrical equipment operate safety.
- 電腦尺寸單位: 公分,台尺或英寸。  
Free to select metric : Cm, Inch, Taiwan unit

### 主要配件/ACCESSORIES:

7吋觸控螢幕顯示  
7 inch touch screen



安全電眼確保操作安全  
Photo-sensor for safety



特殊設計強力電磁煞車離合器  
可防止二次落刀,安全性高  
Special designed powerful clutch avoids  
accidental second time knife cutting



渦輪齒輪傳動出力, 裁切  
寂靜無聲  
Turbine and gear wheel transmissions,  
operation remains silent



後檔板移動由滾珠螺桿  
與線性滑軌組成  
Back guard equip with  
linear guide-way and ball-screw



工作平台皮帶護溝,防止木片掉入溝內  
The table slot cover with guard belt,  
it prevents the veneer dropping.



光學裁切線提供光源及正確指示裁切位置  
Optical cutting line provide light and  
correct indicates cutting position

